
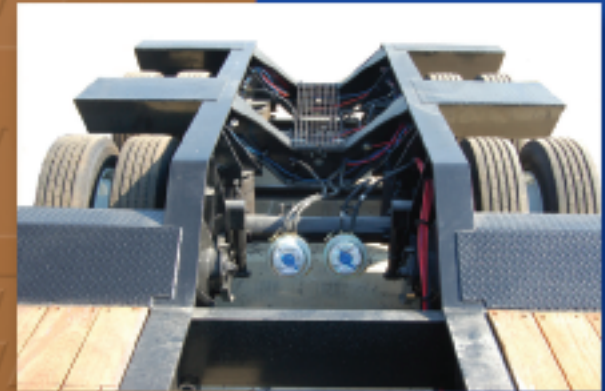


INTERSTATE

**70,000 LB.
CARRYING CAPACITY**

**AIR RIDE SUSPENSION
WITH AUTO & MANUAL
CONTROLS**

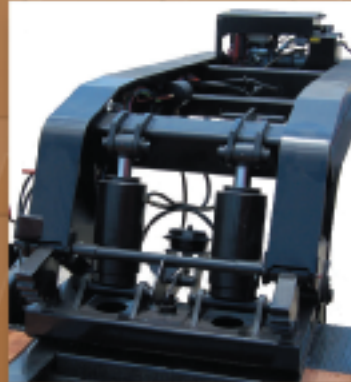

**FOUR (4) BEAM
CONSTRUCTION
WITH INTERLOCKING
CROSSMEMBERS**


70SDGN

**THE
DEFINITION
OF VALUE**

**Call Factory For
Dealer Nearest You:**

1-800-433-5384

www.interstatetrailers.com

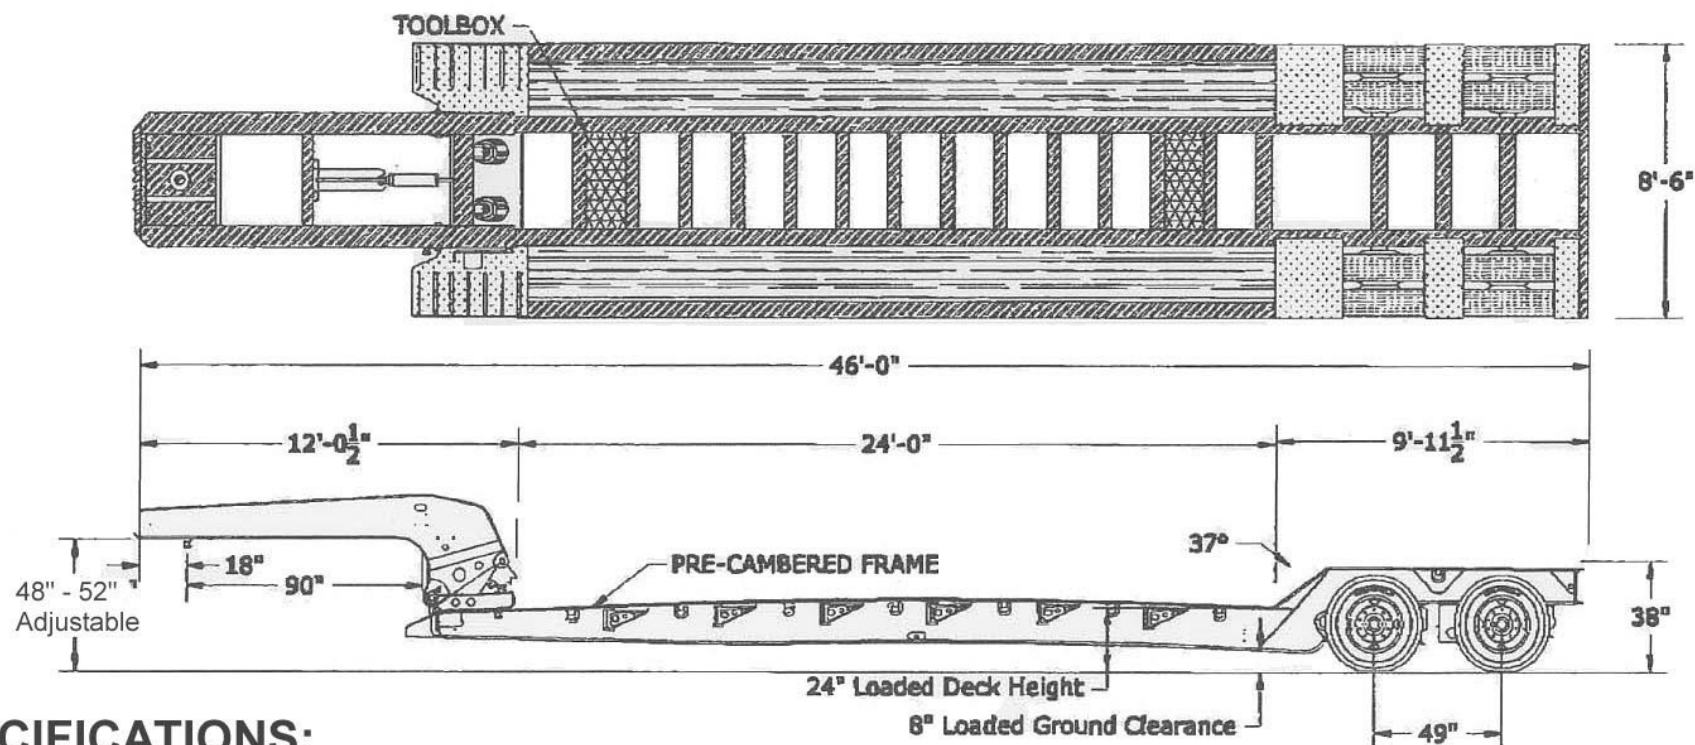

SPECIFICATIONS:

Load Capacity:	70,000 lbs. in 16'.
Weight:	16,200 lbs.
Overall Length:	46'-0".
Width:	8'-6".
Deck Length:	24'-0".
Deck Height:	24" Loaded.
Gooseneck:	Hydraulic Removable, Non-Ground Bearing, (5) Position Ride Hgt., (2) 8" Lift Cylinders.
Hydraulic operation:	Wetline.
Fifth Wheel Hgt.:	48" - 52" Adjustable.
King Pin Plate:	5/16".
King Pin:	18" Setting, 90" Swing Clearance.
Decking:	1-3/4" Apitong Covered Outside, Center Open.
Outriggers:	11 Per Side.
Tie Downs:	(16) Eight Per Side.
Lights & Wiring:	Rubber Mounted LED Lights & Sealed Wiring Harness.

Frame:	Pierced Main Beam Construction With One Piece, Interlocking Crossmembers. True (4) Beam Construction With Positive Camber and Tapered Frame Design. Main Beams: 16" Fabricated I-Beams. Crossmembers: 8" I-Beams X 13 lbs.per ft., 60,000 lb. psi. on 20" Centers.
Boom Well:	"V" Crossmembers With Steel Grating In Bottom.
Suspension:	Air Ride With Auto & Manual Controls.
Axles:	25,000 lb. Capacity, 77.5" Track.
Tires:	255/70R22.5 (H) Low Profile Radials.
Wheels:	8.25 x 22.5 Steel Disc, Hub Piloted.
Brakes:	16-1/2" x 7" With Air Activated Outboard Drums, Automatic Slack Adjusters. Anti-lock Brake System and Spring Parking Brakes.