



# INTERSTATE

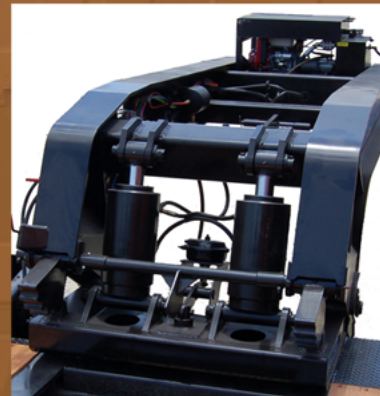

## 102SDGN

THE  
DEFINITION  
OF VALUE

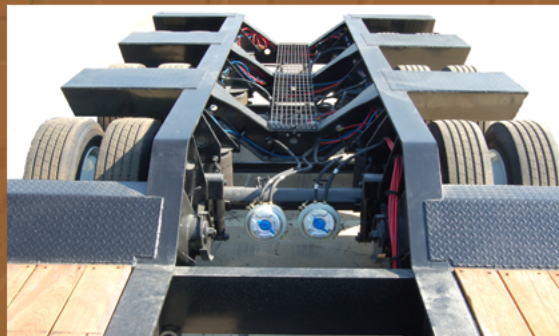

102,000 LB.  
CARRYING CAPACITY

AIR RIDE SUSPENSION  
WITH LIFT 3RD AXLE

FOUR (4) BEAM  
CONSTRUCTION  
WITH INTERLOCKING  
CROSSMEMBERS


“APITONG” DECKING

(2) HEAVY DUTY 8“  
LIFT CYLINDERS

Call factory for  
dealer nearest you:

**1-800-433-5384**

[www.interstatetrailers.com](http://www.interstatetrailers.com)

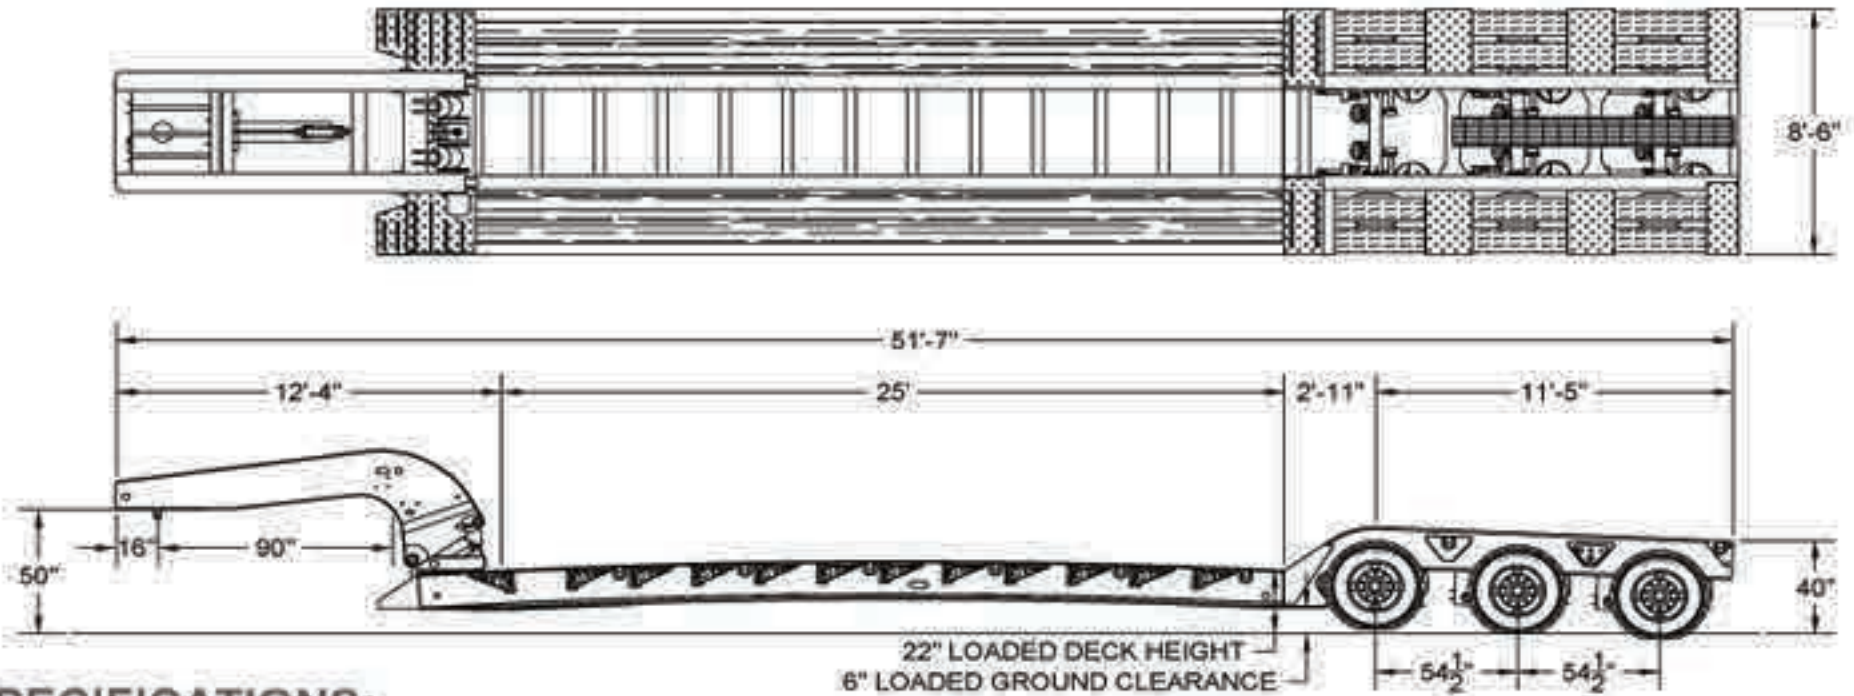

### SPECIFICATIONS:

Load Capacity:	102,000 lbs. in 16'
Weight:	19,600 lbs.
Overall Length:	51'-7"
Width:	8'-6"
Deck Length:	25'-0"
Deck Height:	22" Loaded.
Gooseneck:	Hydraulic Removable, Non-Ground Bearing, (4) Position Ride Hgt., (2) 8" Lift Cylinders.
Hydraulic operation:	Wetline.
Fifth Wheel Hgt.:	48" - 52" Adjustable.
King Pin Plate:	5/16"
King Pin:	18" Setting, 90° Swing Clearance.
Decking:	1- 1/2" Apitong Covered Outside, Center Open.
Outriggers:	12 Per Side.
Tie Downs:	(16) Eight Per Side.
Lights & Wiring:	Rubber Mounted LED Lights & Sealed Wiring Harness.

Frame:	Pierced Main Beam Construction With One Piece, Interlocking Crossmembers, (4) Beam Construction With Positive Camber and Tapered Frame Design Main Beams: 16" Fabricated I-Beams. Side Beams: 14" Fabricated Crossmembers: 10" I-Beams X 13 lbs. per ft., 60,000 lb. psi. on 24" Centers.
Boom Well:	"V" Crossmembers With Steel Grating In Bottom.
Suspension:	Air Ride With Auto & Manual Controls.
Axles:	25,000 lb. Capacity, 77.5" Track.
Tires:	255/70R22.5 (H) Low Profile Radials.
Wheels:	8.25 x 22.5 Steel Disc, Hub Piloted.
Brakes:	16-1/2" x 7" With Air Activated Outboard Drums And Automatic Slack Adjusters. Spring Parking Brakes.