

# INTERSTATE



## 110SDGN

110,000 LB.  
CARRYING CAPACITY

AIR RIDE SUSPENSION  
WITH LIFT 3RD AXLE



FOUR (4) BEAM  
CONSTRUCTION  
WITH INTERLOCKING  
CROSSMEMBERS


“APITONG” DECKING

Call Factory For  
Dealer Nearest You:  
1-800-433-5384

[www.interstatetrailers.com](http://www.interstatetrailers.com)

THE  
DEFINITION  
OF VALUE

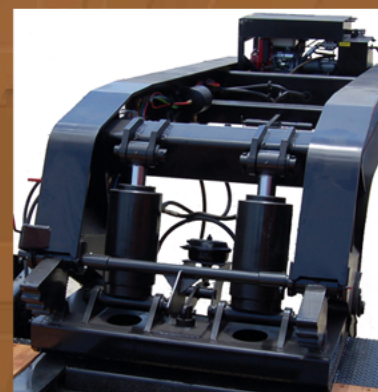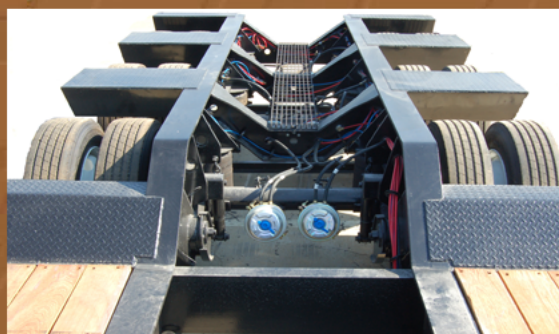

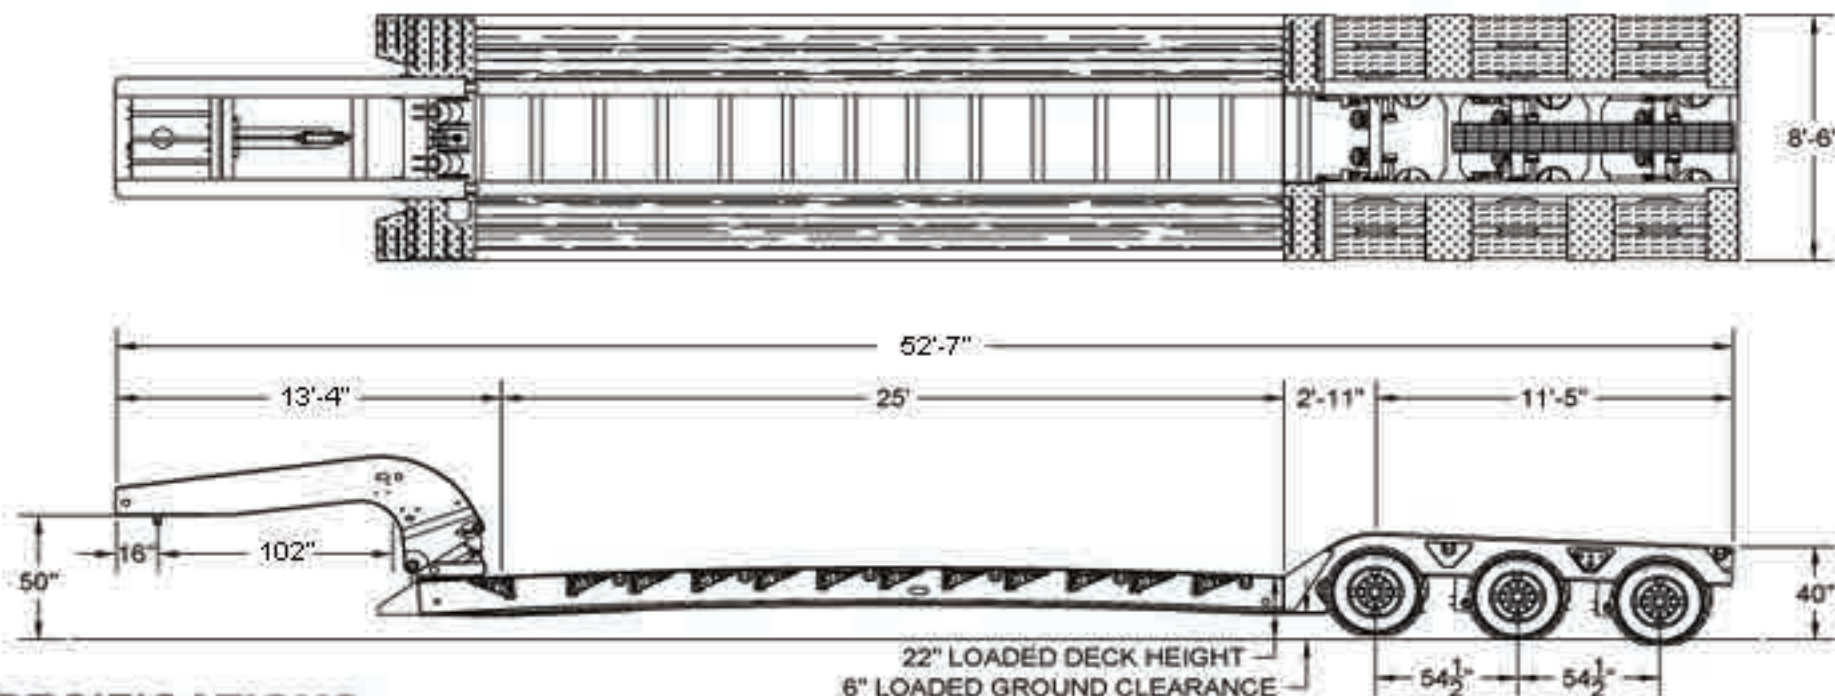

### **SPECIFICATIONS:**

|                      |  |
|----------------------|--|
| Load Capacity:       | 110,000 lbs. in 12'  |
| Weight:              | 19,600 lbs.  |
| Overall Length:      | 52'-7"   |
| Width:               | 8'-6"  |
| Deck Length:         | 25'-0"   |
| Deck Height:         | 22" Loaded.  |
| Gooseneck:           | Hydraulic Removable, Non-Ground Bearing,<br>(4) Position Ride Hgt., (2) 9" Lift Cylinders. |
| Hydraulic operation: | Wetline.   |
| Fifth Wheel Hgt.:    | 48" - 52" Adjustable.  |
| King Pin Plate:      | 5/16"  |
| King Pin:            | 16" Setting, 102" Swing Clearance.   |
| Decking:             | 1-1/2" Apitong Covered Outside, Center Open.   |
| Outriggers:          | 12 Per Side.   |
| Tie Downs:           | (16) Eight Per Side.   |
| Lights & Wiring:     | Rubber Mounted LED Lights & Sealed Wiring Harness.   |

|             |  |
|-------------|--|
| Frame:      | Pierced Main Beam Construction With One Piece,<br>Interlocking Crossmembers.<br>True (4) Beam Construction With Positive Camber<br>and Tapered Frame Design.<br>Main Beams: 16" Fabricated I-Beams.<br>Crossmembers: 10" I-Beams X 13 lbs. per ft.,<br>60,000 lb. psi. on 20" Centers. |
| Boom Well:  | "V" Crossmembers With Steel Grating In Bottom.   |
| Suspension: | Air Ride With Auto & Manual Controls.  |
| Axles:      | 25,000 lb. Capacity, 77.5" Track.  |
| Tires:      | 275/70R22.5, (H) Low Profile Radials.  |
| Wheels:     | 8.25 x 22.5 Steel Disc, Hub Piloted.   |
| Brakes:     | 16-1/2" x 7" With Air Activated Outboard Drums<br>And Automatic Slack Adjusters.<br>Spring Parking Brakes.   |