

INTERSTATE



70SDGN

THE
DEFINITION
OF VALUE

70,000 LB.
CARRYING CAPACITY

AIR RIDE SUSPENSION

FOUR (4) BEAM
CONSTRUCTION
WITH INTERLOCKING
CROSSMEMBERS


“APITONG” DECKING

(2) HEAVY DUTY 8“
LIFT CYLINDERS

Call factory for
dealer nearest you:

1-800-433-5384

www.interstatetrailers.com

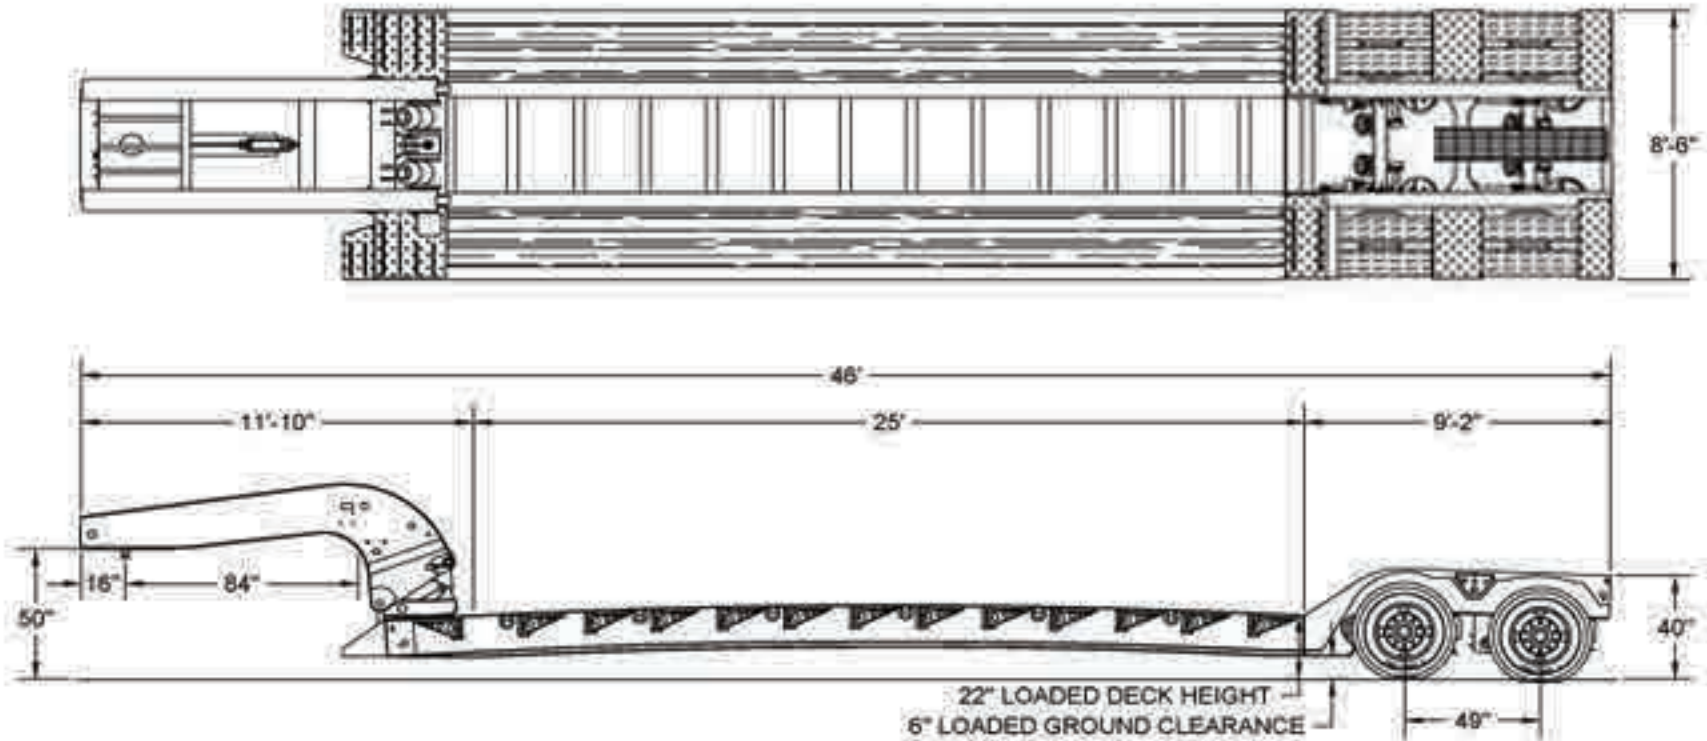

Load Capacity:	70,000 lbs. in 16'
Weight:	16,200 lbs.
Overall Length:	46'-0"
Width:	8'-6"
Deck Length:	25'-0"
Deck Height:	22" Loaded
Gooseneck:	Hydraulic Removable, Non-Ground Bearing, (4) Position Ride Hgt., (2) 8" Lift Cylinders.
Hydraulic operation:	Wetline.
Fifth Wheel Hgt.:	48" - 52" Adjustable.
King Pin Plate:	5/16"
King Pin:	16" Setting, 84" Swing Clearance.
Decking:	1-1/2" Apitong Covered Outside, Center Open.
Outriggers:	11 Per Side.
Tie Downs:	(16) Eight Per Side.
Lights & Wiring:	Rubber Mounted LED Lights & Sealed Wiring Harness.

1 Frame:	Pierced Main Beam Construction With One Piece, Interlocking Crossmembers. True (4) Beam Construction With Positive Camber and Tapered Frame Design. Main Beams: 16" Fabricated I-Beams. Side Beams: 14" Fabricated I-Beams. Crossmembers: 10" I-Beams. 60,000 lb. psi. on 24" Centers
Boom Well:	"V" Crossmembers With Steel Grating In Bottom.
Suspension:	Air Ride With Auto & Manual Controls.
Axles:	25,000 lb. Capacity, 77.5" Track.
Tires:	255/70R22.5 (H) Low Profile Radials.
Wheels:	8.25 x 22.5 Steel Disc, Hub Piloted.
Brakes:	16-1/2" x 7" With Air Activated Outboard Drums, Automatic Slack Adjusters. Anti-lock Brake System and Spring Parking Brakes.