


## Product Specifications

Load Capacity	Trailer Weight	Overall Length	Deck Width	Deck Length
30,000 lbs.	9,100 lbs.	34'3"	8'6"	24'0" tilting platform 51.5" stationary deck

<b>Frame Construction</b>	<p>Pierced main beam construction with one piece interlocking crossmembers</p> <p><u>Main beam chasis:</u> (2) W14" x 26 lbs. per ft., grade 50 Hi-tensile</p> <p><u>Main beam tilt platform:</u> (2) W8 x 15 lbs. per ft., grade 50 Hi-tensile</p> <p>Crossmembers tilt platform: S6" I-beam x 12.5 lbs per ft., grade 50 Hi-tensile strength on 22" centers</p>
<b>Siderails</b>	C8" x 13.75 lbs. per ft., grade 50 Hi-tensile
<b>Decking</b>	2" nominal oak
<b>Headboard</b>	8" x 3" rectangular tube, full width of trailer
<b>Tie Downs</b>	(8) heavy duty D-rings, 4 per side

<b>Underride guard</b>	Meets "National Highway Traffic Safety Administration" mandates FMCSS-223 & FMVSS-224
<b>Suspension</b>	Hutch 9700 multi-point spring with radius rod axle tracking adjustment, 44,000 lb. capacity.
<b>Axles</b>	(2) 16,000 lb capacity with oil bath hubs
<b>Brakes</b>	12-1/4" x 5" electric with integral break away system
<b>Tires</b>	(8) 215/75R17.5 (H)
<b>Wheels</b>	8 hole, hub piloted
<b>Jack</b>	25,000 lb., 2 speed landing leg
<b>Hitch</b>	4 position cast steel pintle eye, 1-5/8" stock, 3" I.D.
<b>Lights</b>	Flush mounted LED in rubber grommets Modular wiring harness with 7-way plug
<b>Paint</b>	Black urethane Rust prohibitive undercoating Available: Black, White, Red, Yellow, or Gray

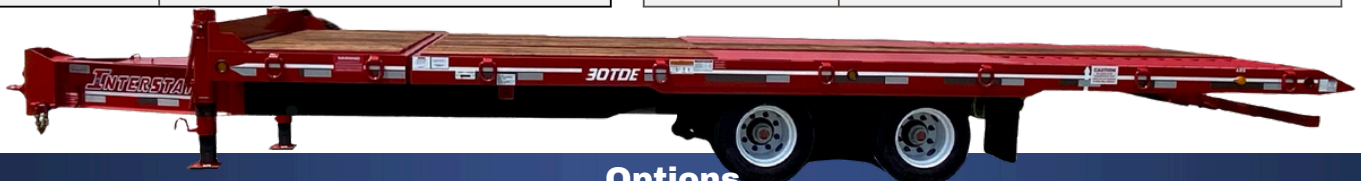

## Options

- Additional deck lengths
- Gooseneck
- Paint color matching or galvanizing
- Tire upgrade
- Spare tire/carrier
- Polished aluminum wheels
- Dual 2-speed jacks
- Hydraulic jacks
- Toolbox lid or enclosure
- Air lift axles
- Additional D-rings
- Apitong decking
- Bucket plate/well
- Hubodometer
- Air ride suspension