


Product Specifications

Load Capacity	Trailer Weight	Overall Length	Overall Width	Deck Width	Deck Length
16,000 lbs.	4,800 lbs.	27'3"	8'6"	82" between fenders	21'0" (18'0" flat deck + 3'6" beavertail)

Frame Construction	<p><u>Main beams:</u> C8" x 13.75 lbs per ft., grade A36 Hi-tensile</p> <p><u>Crossmembers:</u> 6" I-beam x 3.9 lbs. per ft., run between main rails on 22" centers</p>
Ramps	60" x 21" traction with spring assist
Decking	2" nominal oak
Headboard	8" channel full width of trailer
Tie Downs	(6) heavy duty D-rings, 3 per side

Suspension	Multi-point spring with equalizers
Axles	(2) 8,000 lb. capacity
Brakes	12 1/4" x 3 3/8" electric with integral break away system
Tires	(4) 215/75R17.5 (H)
Wheels	8 hole steel disc
Jack	12,000 lb side crank
Hitch	4 position cast steel pintle eye 1-5/8" stock, 3" I.D.
Lights	Flush mounted LED in rubber grommets Modular wiring harness with 7-way plug
Paint	Black urethane Rust prohibitive undercoating Available: Black, White, Red, Yellow, or Gray

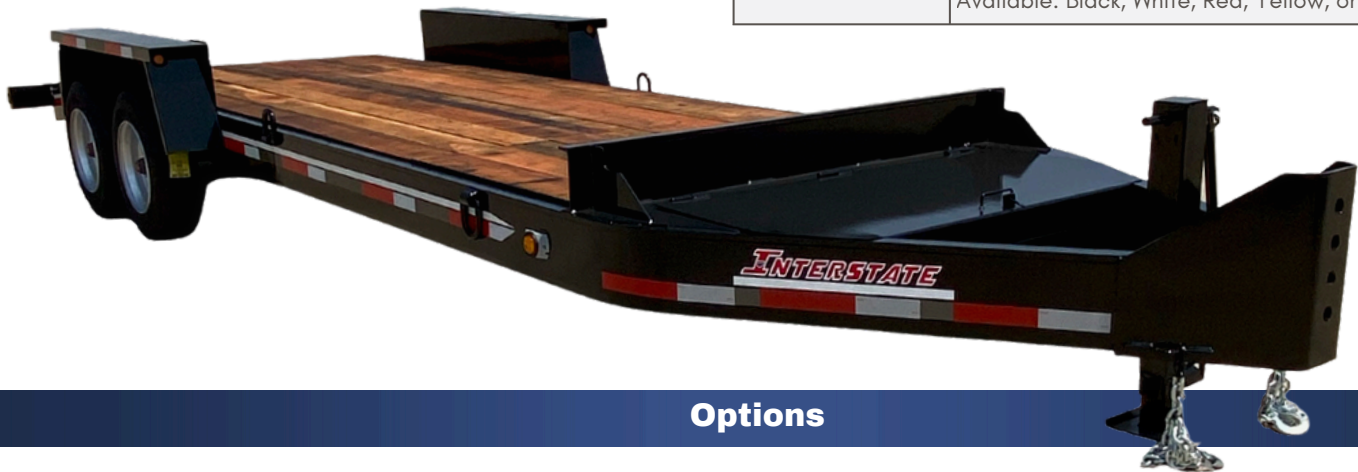

Options

- Ramps (wood/traction, upright)
- Additional deck lengths
- Gooseneck
- Paint color matching or galvanizing
- Polished aluminum wheels
- Hydraulic jacks
- Toolbox lid or enclosure
- Tire upgrade
- Additional D-rings
- Apitong decking
- Hubodometer
- Spare tire/carrier